


# TH LINK Modbus TCP

## Efficient Network Maintenance and Diagnostics for Modbus TCP

The TH LINK Modbus TCP diagnostics hardware provides controller-independent access for monitoring and managing Modbus TCP networks. The diagnostic data is collected from networks comprising up to 254 nodes, and is made available to users through the TH SCOPE software application. TH LINK Modbus TCP is an easy-to-use hardware interface that suits the needs of industrial maintenance personnel.

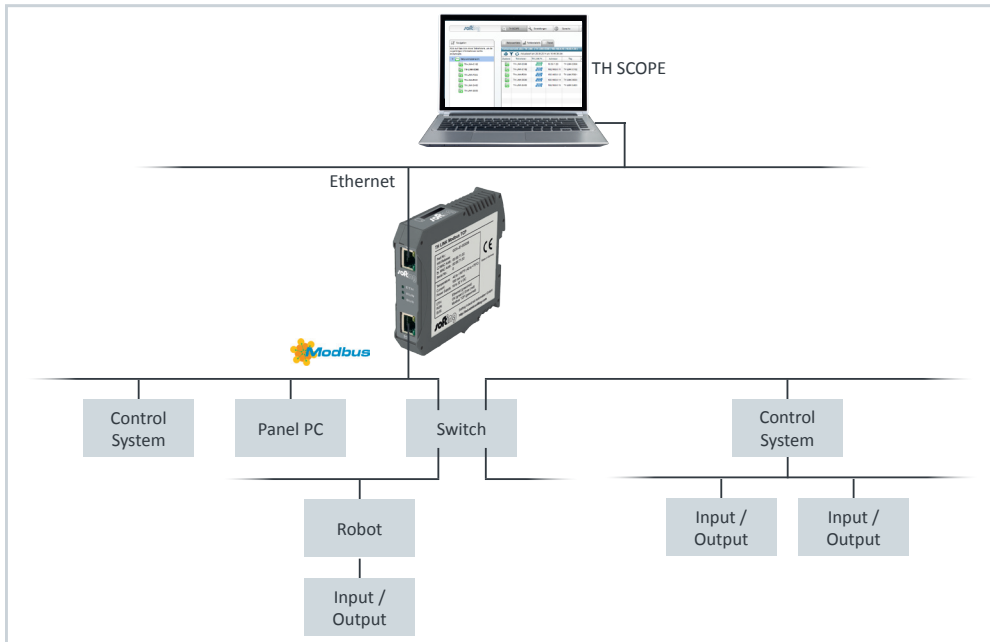

### Plant Integration

- Controller-independent network access
- Interference-free integration into any port available in Modbus TCP networks (even during plant operation)
- Satisfying highest security requirements (no routing, separate access for office network and plant level)
- Easy integration into existing plants thanks to compact design

### Powerful Data Collection

- Data collection for networks with up to 254 nodes (e.g. controllers, IP subnets)
- Combination of active and passive measurements
- Seamless integration with TH SCOPE software for data visualization, data monitoring and plant asset management
- Easy to use web interface for configuration
- Quick and comprehensive network overview

### Tailored solution for Maintenance Staff and Plant Operators

- Suitable for network acceptance testing, monitoring and troubleshooting
- Intuitive handling and operation
- No configuration / engineering required
- Fault identification with intelligent troubleshooting assistance

## Technical Data

Functionality	<ul style="list-style-type: none"><li>• Network detection and data collection</li><li>• Alarm notification in case of fault</li><li>• Basic monitoring, configuration</li><li>• Integrated web server</li><li>• Comprehensive network overview for quick and easy observation</li></ul>
Input Voltage	24 VDC (18 VDC ... 32 VDC)
Current Consumption	max. 180 mA
Current Consumption Relay Contact	max. 100 mA
Operating Temperature	-40 °C ... +75 °C
Relative Air Humidity	5 % ... 95 % (non-condensing)
Ethernet Ports	RJ45 (10 Base-T / 100 Base-TX)
Supported SD Cards	See Release Notes
Mounting	35 mm DIN rail
Dimensions (HxWxD)	22,5 mm x 99 mm x 114,5 mm
Weight	120 g
Certifications	CE

## Scope of Delivery

Hardware	TH LINK Modbus TCP
Documentation	Installation Manual, Release Note (by download)

## Order Numbers

GDA-JA-003036	TH LINK Modbus TCP
---------------	--------------------

## Additional Products and Services

LRA-JY-003024	TH SCOPE (software key)
LRL-JY-003025	TH SCOPE (hardware key)
LRA-JY-003028	TH LINK PC Industrial Ethernet (software key)
LRL-JY-003029	TH LINK PC Industrial Ethernet (hardware key)
GDA-JY-003037	TH LINK Industrial Ethernet

optimize!  
**softing**

**Softing Industrial Automation GmbH**  
Richard-Reitzner-Allee 6  
85540 Haar / Germany  
Tel.: +49 89 456 56-340  
Fax: +49 89 456 56-488  
info.automation@softing.com  
<http://industrial.softing.com>

**Softing Inc.**  
US Headquarter  
7209 Chapman Highway  
Knoxville, TN 37920 / USA  
Tel.: +1 865 251 52 52  
Fax: +1 865 579 47 40  
info@softing.us  
<http://www.softing.us>

**Softing Industrial Automation GmbH**  
Äußere Sulzbacher Straße 159-161  
90491 Nürnberg / Germany  
Tel.: +49 911 544 27-0  
Fax: +49 911 544 27-27  
info.automation@softing.com  
<http://industrial.softing.com>

**Softing Inc.**  
US Sales Office  
29 Water Street, Suite 301  
Newburyport, MA 01950 / USA  
Tel.: +1 978 499 96 50  
Fax: +1 978 499 96 54  
info@softing.us  
<http://www.softing.us>

**Buxbaum Automation GmbH**  
Thomas-Alva-Edison-Straße 1  
7000 Eisenstadt / Austria  
Tel.: +43 2682 704 560  
Fax: +43 2682 205 77 00-5610  
office@myautomation.at  
<http://myautomation.at>

**Softing Italia Srl**  
Via Padre Massimiliano Kolbe, 6  
20090 Cesano Boscone (MI) / Italy  
Tel.: +39 02 450 51 71  
Fax: +39 02 450 41 41  
info@softingitalia.it  
<http://softingitalia.it>

Your local Softing Contact