


PBpro PCI

Universal PCI Boards for Use as Master or Slave

Single and dual channel interface boards in universal PCI format for integrating PCs into PROFIBUS architectures as machine controllers, supervisory control applications, field devices or operator panels.

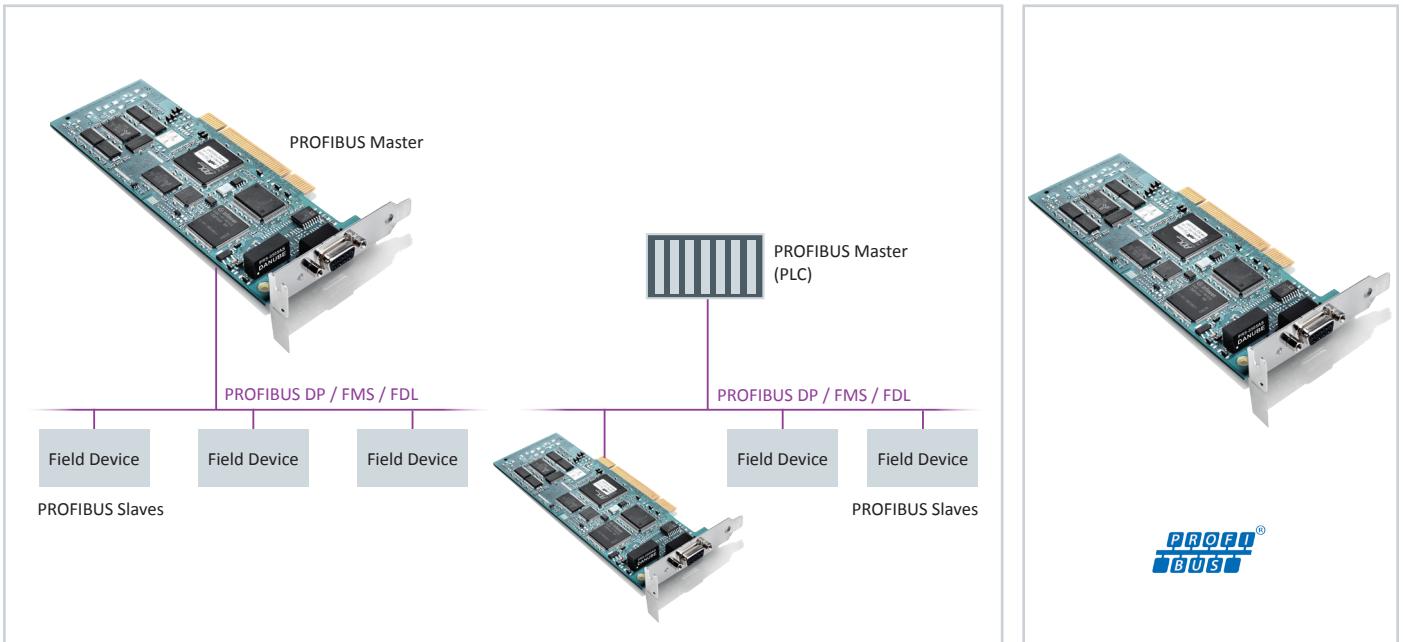

Always the Fitting PROFIBUS Protocol

- PROFIBUS Master and Slave functionality
- Support of PROFIBUS DP, PROFIBUS FMS and PROFIBUS FDL protocols
- Universal interface solution for integration in industrial and embedded PCs




Rapid Integration Using API or OPC Server

- Direct access to all protocols via PROFIBUS API
- Sample programs including comments
- Integration in various plant asset management tools
- Optional access by OPC Clients using Softing's OPC Server

Large Choice of Drivers

- Use in Windows and Linux operating systems
- PROFIBUS ComdTM for FDT applications included in scope of delivery

Technical Data

	Master/Slave, Single Channel ¹	Slave, Single Channel ¹	Master/Slave, Dual Channel
PROFIBUS Protocol			
DP-V0 Master	•		•
DP-V1 Master: Acyclic C2 Services	•		•
DP-V2 Master ¹	•		•
FMS	•		•
FDL	•		•
DP-V0 Slave	•	•	•
Fieldbus Connection	9-Pin D-Sub female, EIA-485, galvanically isolated		
Transfer Rates	9.6; 19.2; 45.45; 93.75; 187.5; 500; 1,500; 3,000; 6,000; 12,000 Kbit/s		
PC Interface	PCI V2.2, 128 KB Shared RAM Per Channel		
Operating Temperature	0 °C ... +70 °C		
Storage Temperature	-20 °C ... +70 °C		
Relative Humidity	< 90 %, non-condensing		
Dimensions	168 mm x 64 mm	168 mm x 64 mm	168 mm x 107 mm
Power Supply			
Supply Voltage	5 VDC / 3.3 VDC (±5 %)		
Current Consumption	Typically 500 mA / 200 mA	Typically 500 mA / 200 mA	Typically 700 mA / 300 mA
Drivers Available for	Windows XP, Windows 7, Windows 8, Windows 10, Linux		
Conformity	  		

¹ Also Available with Low Profile Slot Bracket

² DP-V2 available for custom integration.

Please contact Softing to discuss your specific requirements.

Scope of Delivery

Hardware	PC interface board
Software	Drivers, sample programs on CD-ROM
Documentation	On CD-ROM

Order Numbers

Master/Slave, Single Channel	Slave, Single Channel	Master/Slave, Dual Channel
PB-PRO1-PCI (PB-PRO1-PCI/LP)	PB-PRO1S-PCI (PB-PRO1S-PCI/LP)	PB-PRO2-PCI

Additional Products and Services

OPC-PB ¹	PROFIBUS OPC Server for DP-V0 / DP-V1
TRA-PB-TECH	PROFIBUS technology training

¹ Requires PROFIBUS Master Interface Board

optimize!
softing

Your local Softing Contact

Softing Industrial Automation GmbH
Richard-Reitzner-Allee 6
85540 Haar / Germany
Tel.: +49 89 456 56-340
Fax: +49 89 456 56-488
info.automation@softing.com
http://industrial.softing.com

Softing Industrial Automation GmbH
Äußere Sulzbacher Straße 159-161
90491 Nürnberg / Germany
Tel.: +49 911 544 27-0
Fax: +49 911 544 27-27
info.automation@softing.com
http://industrial.softing.com

Buxbaum Automation GmbH
Thomas-Alva-Edison-Straße 1
7000 Eisenstadt / Austria
Tel.: +43 2682 704 560
Fax: +43 2682 205 77 00-5610
office@myautomation.at
http://myautomation.at

Softing Inc.
US Headquarter
7209 Chapman Highway
Knoxville, TN 37920 / USA
Tel.: +1 865 251 52 52
Fax: +1 865 579 47 40
info@softing.us
http://www.softing.us

Softing Inc.
US Sales Office
29 Water Street, Suite 301
Newburyport, MA 01950 / USA
Tel.: +1 978 499 96 50
Fax: +1 978 499 96 54
info@softing.us
http://www.softing.us

Softing Italia Srl
Via Padre Massimiliano Kolbe, 6
20090 Cesano Boscone (MI) / Italy
Tel.: +39 02 450 51 71
Fax: +39 02 450 41 41
info@softingitalia.it
http://softingitalia.it